



Specification

- ◆ Ductile Iron (Spheroidal Graphite)
- ◆ EN124 - Class D400 (Product Standard)
- ◆ Kitemark (BSI Certification)
- ◆ CE Mark (EC Council Directive 89/106/EEC)

Features

- ◆ Single Hinged Cover
- ◆ Non-Rock Action
- ◆ Flat Grating
- ◆ Three-Sided Frame Flange
- ◆ Flush Kerbside Finish
- ◆ Recessed End Hinge
- ◆ Black Bitumen Coated
- ◆ Locking Bolt Option
- ◆ Customised Locking Option

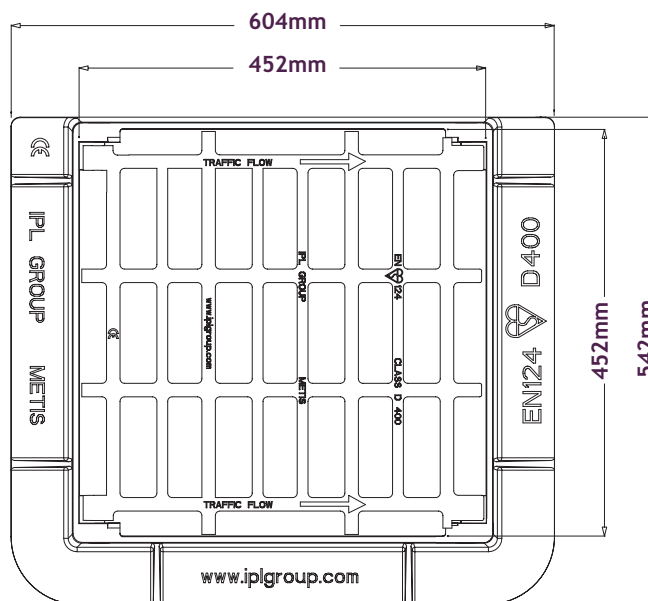

metis

Recommended for use in city and urban areas that require large waterway area for quick drainage of surface water



Product Code
C-MD400



IPL group

Industrial Plant Ltd.
Innovative Products Ltd.

Slane Road, Drogheda,
Co. Louth, Ireland.
Tel: +353 41 983 2591
Fax: +353 41 983 2599
Email: info@ipl.ie
Website: www.ipigroup.com

Technical Data

EN124 Class	Frame Opening (mm)	Frame Size (mm)	Frame Depth (mm)	Weight (kg)	Waterway Area
D400	452x452	604x542	100	37.8	1358cm ²

Group 4: Carriageways of roads (including pedestrian streets), hard shoulders and parking areas for all types of road vehicles.



Measurements and weights are approx. The designs are the property of Innovative Products Ltd (IPL group) and may not be reproduced without express permission. Innovative Products reserve the right to amend specifications or to withdraw models without prior notice. © February 2009.